

HEADQUARTERS

FAAC spa
Via Calari 10 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 758518
info@faac.it - www.faacgroup.com

FAAC SUBSIDIARIES

FAAC AG
Tel. +41 52 3461721
Fax +41 52 3461723
Illnau, Switzerland
www.faac.ch

FAAC FRANCE
Tel. +33 472218700
Fax +33 472218701
Corbas, France
www.faac.fr

FAAC GMBH
Tel. +49 8654 49810
Fax +49 8654 498125
Freilassing, Germany
www.faac.de

FAAC MIDDLE EAST
Dubai, Emirati Arabi
www.faac.ae
info@faac.ae

F.A.A.C. SA
Tel. +34 91 6613112
Fax +34 91 6610050
Madrid, España
www.faac.es

FAAC UK LTD.
Tel. +44 1256 318100
Fax +44 1256 318101
Basingstoke Hampshire, UK
www.faac.co.uk

FAAC AUSTRALIA PTY LTD
Tel. +61 2 7565644
Fax +61 2 87565677
Homebush – Sydney, Australia
www.faac.com.au

FAAC NORD
Tel. +33 1 69191620
Fax +33 1 69536069
Massy, France
www.faac.fr

FAAC INDIA PVT. LTD
Tel. +91 120 3934100/4199
Fax +91 120 4212132
Noida – Delhi, India
www.faacindia.com

FAAC POLSKA SP.ZO.O.
Tel. +48 22 8141125
Fax +48 22 8142024
Warszawa, Polska
www.faac.pl

F.A.A.C. SA Delegación Cataluña
Tel. +34 93 4362000
Fax +34 93 5727994/4368225
Barcelona, España
www.faac.es


FAAC BENELUX
Tel. +32 50 320202
Fax +32 50 32024215
Brugge, Belgium
www.faac.be

FAAC G.E.S. M.B.H.
Tel. +43 662 8533950
Fax +43 662 85339520
Wals – Siezenheim, Austria
www.faac.at

FAAC INTERNATIONAL INC.
Tel. +1 307 6351991
Fax +1 307 6328148
Cheyenne, USA
www.faacusa.com

FAAC SCANDINAVIA AB
Tel. +46 36 376860
Fax +46 36 370780
Bankeryd, Sweden
www.faac.se

FAAC SHANGHAI
Tel. +86 21 68182970
Fax +86 21 68182968
Shanghai, China
www.faac.com.cn

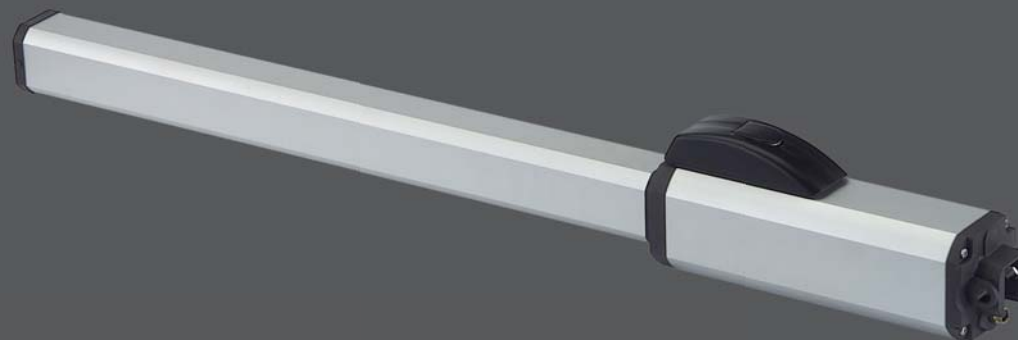

422 Hydraulic operator for swing-leaf gates


FAAC

THE 422 operator is designed for gate leaves up to 3m
 422 CBC-CBAC-CBACS - max length 1.8m
 422 SB- SBS - max length 3m
 422 PED CBC-SB max length 1.2m

- It is a versatile range
- Maximum anti-crushing safety thanks to an exclusive hydraulic device
- Anti-corrosion cover with high weather resistance




422 manual release key



452 MPS control board



455D control board

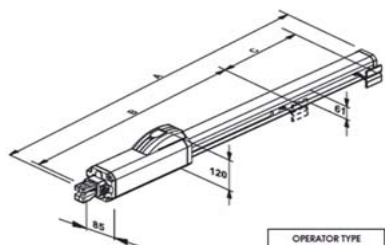

Dimensions of the 422 unit.

	OVERALL DIMENSIONS	OPERATOR TYPE	
		STANDARD	PEDESTRIAN
A	987 mm.	827 mm.	
B	693 mm.	613 mm.	
C	240 mm.	160 mm.	

TECHNICAL SPECIFICATIONS 422

	422 CBAC 1l	422SB 1l	422 CBC	422 CBAC	422 CBACS	422 SBS	422 PED CBC	422 PED SB
Power supply voltage:	230 Vac (+6% - 10%) 50(60) Hz							
Power:	220 W							
Absorbed current:	1A							
Motor rotation speed:	1400 RPM							
Rod extension speed:	1.3cm/s				1cm/s		2cm/s	
Pump flow rate:	1 l/min				0.75 l/min		1.5 l/min	
Traction and thrust force:	0 to 500 daN				0 to 690 daN		0 to 380 daN	
Operating ambient temperature:	-20°C - +55°C							
Thermal protection on motor winding:	120 °C							
Weight:	7kg							
Type of oil:	FAAC HP Oil							
Protection Class:	IP 55							
Dimensions (L x D x H) in mm	987 x 120 x 85mm - pedestrian 827 x 120 x 85mm							